

WinLed


lighting solutions

Installatie handleiding WinLed Prefab Opbouw


Warning!

- Bij doorlussen $I_{max} = 16A$.
- Lichtbron niet vervangbaar.


LPA

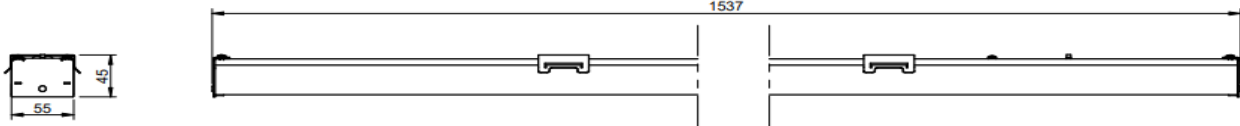


LPA L1530

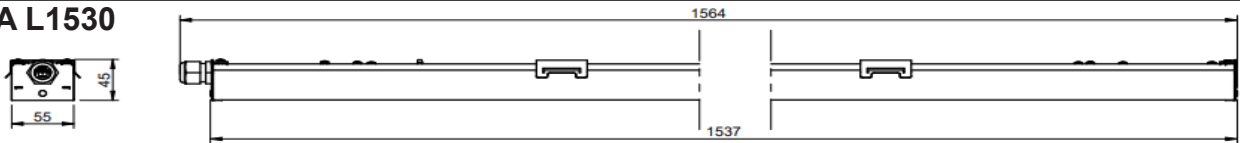

LPA TW

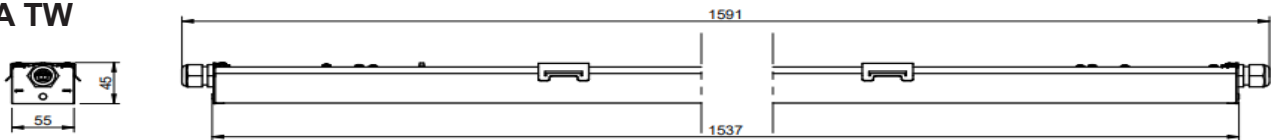

Technical Data	LPA01	LPA09	LPA10	LPA15	LPA09 (25°)	LPA10 (25°)	LPA315 (25°)
Nominale vermogen	35W	63W	85W	115W	63W	85W	115W
Nominale spanning	220...240	220...240	220...240	220...240	220...240	220...240	220...240
Nominale stroom	0,15A	0,275A	0,375A	0,505A	0,275A	0,375A	0,505A
Nominale frequentie	0/50/60	0/50/60	0/50/60	0/50/60	0/50/60	0/50/60	0/50/60
Power factor	0,96	0,96	0,97	0,97	0,96	0,97	0,97
Lichtopbrengst	5000lm	8200lm	12200lm	16500lm	8700lm	13000lm	17000lm
IP rating	IP20	IP20	IP20	IP20	IP20	IP20	IP20
Units/circuit (breaker 16A(B))	30	28	24	13	28	24	13
Dali units/Circuit (Breaker 16A(B))	28	18	18	32	18	18	32
Gewicht	2,4 kg	2,4 kg	2,4 kg	2,4 kg	2,4 kg	2,4 kg	2,4 kg



No Dim

